


**[Under Development]**

## EXTERNAL DIMENSIONS

Brushed Motor

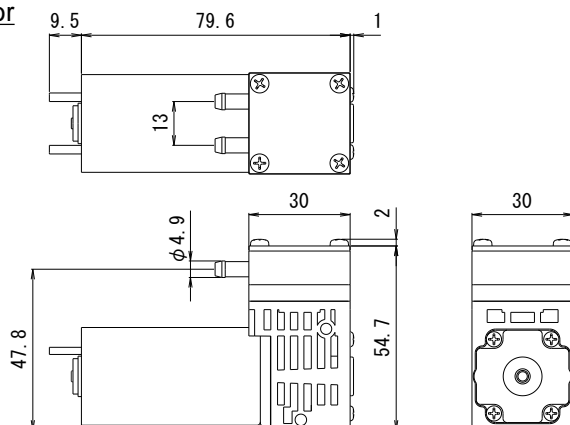


## SPECIFICATIONS

Model Number	D30S_0002_D
Motor	DC Brushed Motor
Type	Diaphragm Pump
Rated Voltage	DC 24V
Flow Rate at 0kPa	> 300mL/min
Current Consumption at 0kPa	< 500mA
Maximum Pressure	> 300kPa
Ambient Temperature Range	5 – 50°C
Fluid Temperature Range	5 – 40°C
Durability	1000H
Noise level	-
Wetted Materials	FFKM / PTFE / PPS (modifiable)
Port Connection	Inlet: Hose Barb (Tube Retaining Design) Outlet: Hose Barb (Tube Retaining Design)
Weight	195g
Food Sanitation Act	-

Note: Values are tentative and subject to change.

## CHARACTERISTIC CURVE

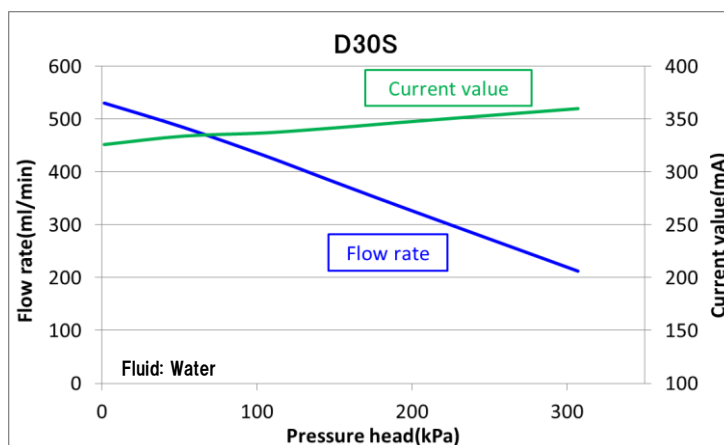

Note: Details such as specifications, etc., may be changed without notice.

