


**[Under Development]**

## EXTERNAL DIMENSIONS

Brushed Motor

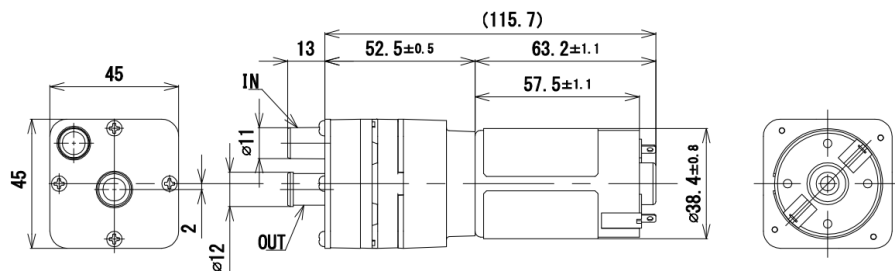


## SPECIFICATIONS

Model Number	S45L_0001A
Motor	DC Brushed Motor
Type	Diaphragm Pump
Rated Voltage	DC 24V
Flow Rate at 0kPa	> 6L/min
Current Consumption at 0kPa	< 1200mA
Maximum Pressure	> 250kPa
Ambient Temperature Range	5 - 50°C
Fluid Temperature Range	5 - 40°C
Durability	500H
Noise level	-
Wetted Materials	SPS / EPDM
Port Connection	Inlet: Straight Barb
	Outlet: Hose barb (Tube Retaining Design)
Weight	355g
Food Sanitation Act	-

Note: Values are tentative and subject to change.

## CHARACTERISTIC CURVE

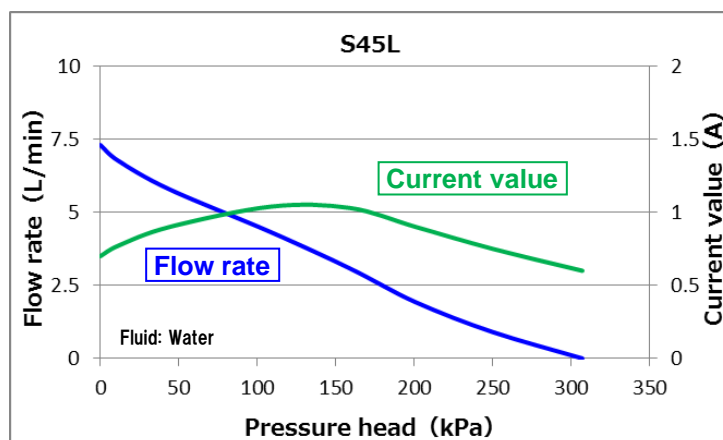

Note: Details such as specifications, etc., may be changed without notice.

